



## SMD - Resistors

---

Product : Thin Film Current Sensing Chip Resistor –SMDS Series

---

Size : 0402/0603/0805/1206/2010/2512

---



## SMD - Resistors


### Thin Film Current Sensing Chip Resistor (SMDS Series)

#### ► 1. Features


- Thin film process
- High power rating up to 3 Watts in 2512 size
- Tight tolerance down to  $\pm 0.5\%$
- Extremely low TCR down to  $\pm 50$  PPM/ $^{\circ}\text{C}$
- Resistance values from 50m to 1ohm
- High purity alumina substrate for high power dissipation

#### ► 2. Applications

- Power Management Applications
- Switching Power Supply
- Over Current Protection in Audio Applications
- Voltage Regulation Module (VRM)
- DC-DC Converter, Battery Pack, Charger, Adaptor
- Automotive Engine Control
- Disk Driver
- Portable Devices (PDA, Cell Phone)

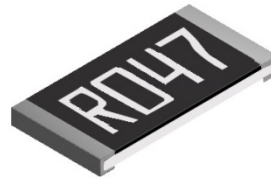

#### ► 3. Construction

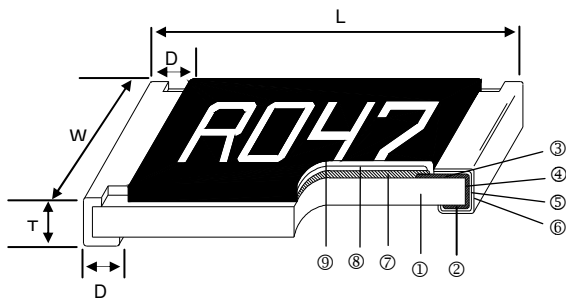

① Alumina Substrate	④ Edge Electrode (NiCr)	⑦ Resistor Layer (NiCr)
② Bottom Electrode (Ag)	⑤ Barrier Layer (Ni)	⑧ Overcoat (Epoxy)
③ Top Electrode (Ag-Pd)	⑥ External Electrode (Sn)	⑨ Marking

## SMD - Resistors

### ► 4. Dimensions


Unit: mm

Type	Size (Inch)	L	W	T	D1	D2	Weight (g) (1000pcs)
SMDS 0402	0402	1.00±0.05	0.50±0.05	0.32±0.10	0.25±0.10	0.20±0.10	0.56
SMDS 0603	0603	1.60±0.10	0.80±0.10	0.45±0.10	0.30±0.20	0.30±0.20	3.1
SMDS 0805	0805	2.00±0.15	1.25±0.15	0.55±0.10	0.30±0.20	0.40±0.25	5.6
SMDS 1206	1206	3.05±0.15	1.55±0.15	0.55±0.10	0.50±0.30	0.40±0.25	12.3
SMDS 2010	2010	5.00±0.20	2.45±0.15	0.60±0.15	0.60±0.30	0.50±0.25	26.7
SMDS 2512	2512	6.35±0.20	3.15±0.15	0.60±0.10	0.60±0.30	0.55±0.25	49.6

### ► 5. Part Numbering

SMDS	2512	F	T	E		R010	N
Product Type	Dimensions (L×W)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance	Marking
	0402 0603 0805 1206 2010 2512	D: ±0.5% F: ±1%	T: Taping Reel B: Bulk	D: ±50 E: ±100 F: ±200	: Standard R: 3W	R010: 0.01Ω R100: 0.1Ω 1R00: 1Ω	: Standard N: No Marking

### ► 6. Derating Curve

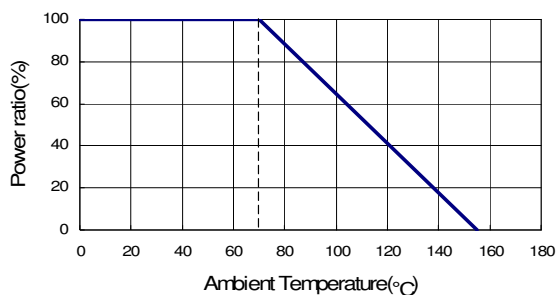

## SMD - Resistors

### 7. Standard Electrical Specifications

Type	Item	Power Rating at 70°C	Operating Temp. Range	Resistance Range (mΩ)		TCR (PPM/°C)
				±0.5%	±1%	
SMDS 0402		1/16W	-55~+155°C	500 - 1000		±100 ±50
SMDS 0603		1/10W	-55~+155°C	200 - 300 301 - 1000		±100 ±50
SMDS 0805		1/8W		200 - 300 301 - 1000		±100 ±50
SMDS 1206		1/4W	-55~+155°C	-	50 - 100	±200 ±100 ±50
				101 - 300 301 - 1000		
SMDS 2010		3/4W	-55~+155°C	50 - 100 101 - 300 301 - 1000		±200 ±100 ±50
SMDS 2512		1W	-55~+155°C	50 - 100 101 - 300 301 - 1000		±200 ±100 ±50

### 7.1 High Power Rating Electrical Specifications

Type	Item	Power Rating at 70°C	Operating Temp. Range	Resistance Range (mΩ)		TCR (PPM/°C)
				±1%		
SMDS 2512		3W	-55~+155°C	100 - 1000		±100

Operating Voltage= $\sqrt{P \cdot R}$

Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$


### 8. Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	<b>MIL-STD-202F Method 304</b> +25/-55/+25/+125/+25°C
Short Time Overload	±1%	<b>JIS-C-5201-1 5.5</b> RCWV*2.5 or Max. overload voltage for 5 seconds
Insulation Resistance	>1000MΩ	<b>MIL-STD-202F Method 302</b> Apply 100V <sub>DC</sub> for 1 minute
Endurance	±1%	<b>MIL-STD-202F Method 108A</b> 70±2°C, Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	±0.5%	<b>MIL-STD-202F Method 103B</b> 40±2°C, 90~95% R.H. Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Bending Strength	As Spec.	<b>JIS-C-5201-1 6.1.4</b> Bending amplitude 3mm for 10 seconds
Solderability	95% min. coverage	<b>MIL-STD-202F Method 208H</b> 245±5°C for 3 seconds
Resistance to Soldering Heat	±0.5%	<b>MIL-STD-202F Method 210E</b> 260±5°C for 10 seconds
Dielectric Withstand Voltage	By Type	<b>MIL-STD-202F Method 301</b> Apply Max. Overload Voltage for 1 minute
Thermal Shock	±0.5%	<b>MIL-STD-202F Method 107G</b> -55°C ~150°C, 100 cycles
Low Temperature Operation	±0.5%	<b>JIS-C-5201-1 7.1</b> 1 hour, -65°C followed by 45 minutes of RCWV

■ Storage Temperature: 25±3°C; Humidity < 80%RH

# SMD - Resistors

## ► 9. Reflow

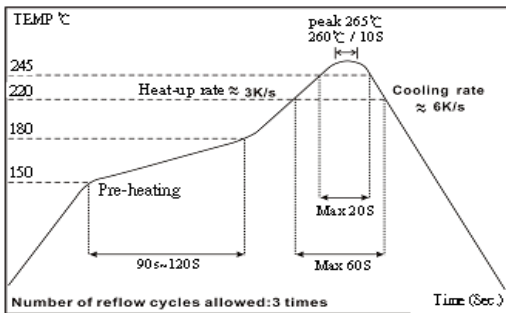

## ► 10. Marking

### 0603 3digit marking

Example :

Resistance	1Ω	0.1Ω	0.15Ω	0.01Ω	0.101Ω	0.035Ω
Codes	1R0	R10	R15	R01	<u>101</u>	<u>035</u>

### 0805-2512 4digit marking

Example :


Resistance	1Ω	0.1Ω	0.05Ω	0.015Ω	0.01Ω
Codes	1R00	R100	R050	R015	R010

## ► 11. Packaging

Packaging Quantity & Reel Specifications


Unit :mm

Type	ψA	ΦB	ψC	W	T	Paper Tape (EA)	Emboss Plastic Tape (EA)
TCS02	178.0±1.0	60.0±1.0	13.5±0.7	9.5±1.0	11.5±1.0	10,000	
TCS03	178.0±1.0	60.0±1.0	13.5±0.7	9.5±1.0	11.5±1.0	5,000	-
TCS05	178.0±1.0	60.0±1.0	13.5±0.7	9.5±1.0	11.5±1.0	5,000	-
TCS06	178.0±1.0	60.0±1.0	13.5±0.7	9.5±1.0	11.5±1.0	5,000	-
TCS10	178.0±1.0	60.0±1.0	13.5±0.7	13.5±1.00	15.5±1.0	-	4,000
TCS12	178.0±1.0	60.0±1.0	13.5±0.7	13.5±1.00	15.5±1.0	-	4,000

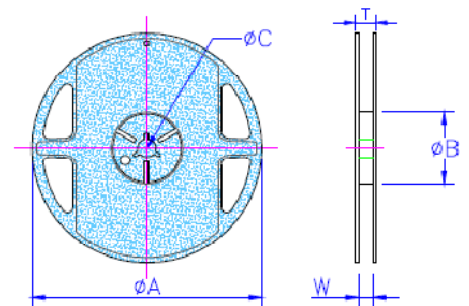

# SMD - Resistors


## Paper Tape Specifications

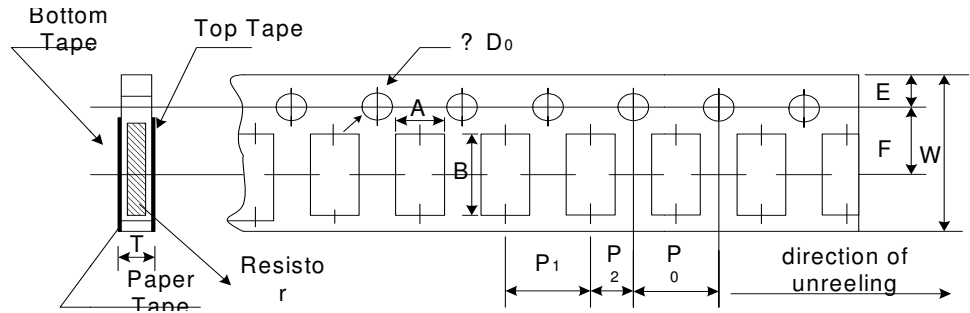


Unit: mm

Type	A	B	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ψD <sub>0</sub>	T
SMDS0402	0.70±0.05	1.16±0.05	8.00±0.10	1.75±0.05	3.5±0.05	4.00±0.10	2.00±0.05	2.00±0.05	1.55±0.05	0.40±0.03
SMDS0603	1.10±0.05	1.90±0.05	8.00±0.10	1.75±0.05	3.5±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.60±0.03
SMDS0805	1.60±0.05	2.37±0.05	8.00±0.10	1.75±0.05	3.5±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.75±0.05
SMDS1206	2.00±0.05	3.55±0.05	8.00±0.10	1.75±0.05	3.5±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.55±0.05	0.75±0.05

- Peel force of top cover tape
- The peel speed shall be about 300mm/min±5%
- The peel force of top cover tape shall be between 10 to 100g

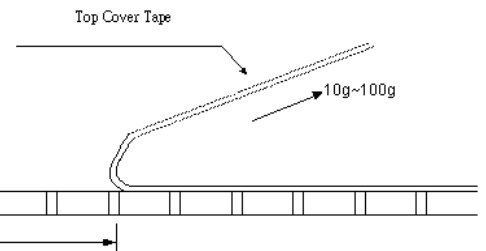


## Emboss Plastic Tape Specifications

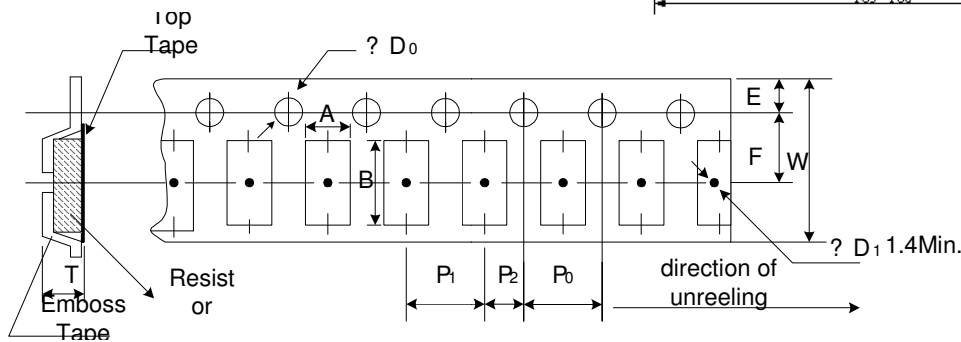

Unit: mm


Type	A	B	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ψD <sub>0</sub>	T
SMDS2010	2.85±0.10	5.45±0.10	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50±0.10	1.00±0.20
SMDS2512	3.40±0.10	6.65±0.10	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50±0.10	1.00±0.20

- Peel force of top cover tape
- The peel speed shall be about 300mm/min±5%
- The peel force of top cover tape shall be between 10 to 130g

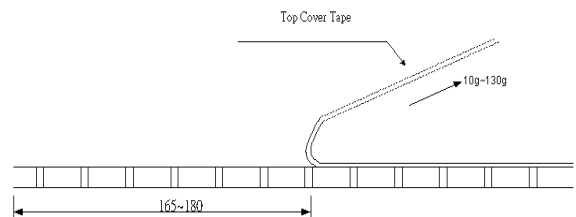

## SMD - Resistors

### ▶ 12. Recommended Land Pattern

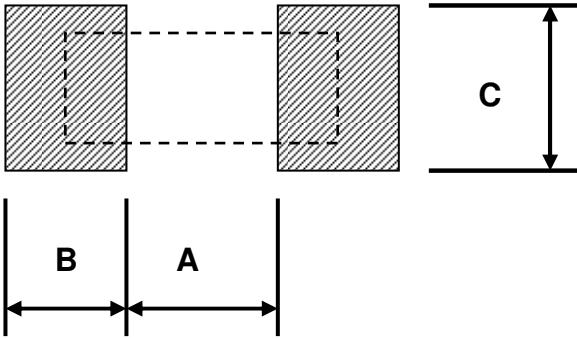

Unit : mm

Type	A	B	C
SMDS0402	0.50	0.50	0.60±0.2
SMDS0603	0.80	1.00	0.90±0.2
SMDS0805	1.00	1.00	1.35±0.2
SMDS1206	2.00	1.15	1.70±0.2
SDMS2010	3.60	1.40	2.50±0.2
SDMS2512	4.90	1.60	3.10±0.2