

## SMD - Resistors

Product: Current Sensing Thick Film Chip Resistor-SMDB Series

Size: 0402/0603/0805/1206/1210/2010/2512



official distributor of



## SMD - Resistors

### Current Sensing Thick Film Chip Resistor – SMDB Series

#### ► 1. Scope


– This specification applies to all sizes of rectangular-type fixed chip resistors with Ruthenium-base as material.

#### ► 2. Features


- Low inductance
- Highly reliable multilayer electrode construction
- Higher component and equipment reliability
- Reduced size of final equipment reliability

#### ► 3. Applications

- Power Management Applications
- Switching Power Supply
- Over Current Protection in Audio Application
- Voltage Regulation Module (VRM)
- DC-DC Converter, Battery Pack, Charger, Adaptor
- Automotive Engine Control
- Disk Driver
- Portable Devices (PDA, Cell Phone)

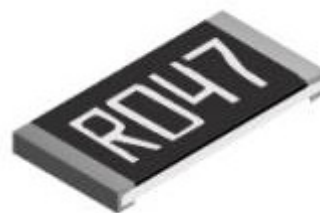

#### ► 4. Construction

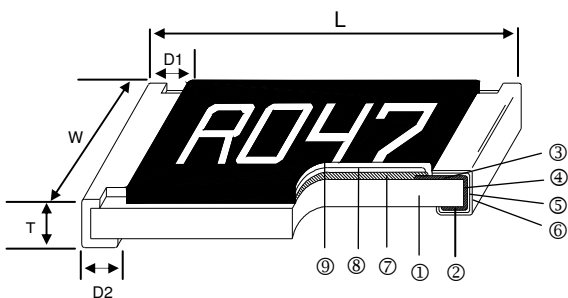

① Alumina Substrate	④ Edge Electrode (NiCr)	⑦ Resistor Layer (RuO <sub>2</sub> /Ag)
② Bottom Electrode (Ag-Pd)	⑤ Barrier Layer (Ni)	⑧ Primary Overcoat (Glass)
③ Top Electrode (Ag)	⑥ External Electrode (Sn)	⑨ Secondary Overcoat (Epoxy)

## SMD - Resistors

### 5. Dimensions


Unit: mm

Type	Size (Inch)	L	W	T	D1	D2	Weight (g) (1000pcs)
SMDB0402	0402	1.00±0.05	0.50±0.05	0.35±0.05	0.20±0.10	0.20±0.10	0.620
SMDB0603	0603	1.60±0.10	0.80±0.10	0.45±0.10	0.30±0.20	0.30±0.20	2.042
SMDB0805	0805	2.00±0.10	1.25±0.10	0.50±0.10	0.35±0.20	0.40±0.20	4.368
SMDB1206	1206	3.10±0.10	1.55±0.10	0.55±0.10	0.50±0.25	0.50±0.20	8.947
SMDB1210	1210	3.20±0.20	2.60±0.15	0.55±0.10	0.50±0.25	0.50±0.20	15.959
SMDB2010	2010	5.00±0.20	2.50±0.15	0.55±0.10	0.60±0.25	0.50±0.20	24.241
SMDB2512	2512	6.35±0.20	3.20±0.15	0.55±0.10	0.60±0.25	0.50±0.20	39.448

### 6. Part Numbering

SMDB	0603	F	L	7	- 0R047
Product Type	Dimensions (LxW)	Resistance Tolerance	Function Code	Packaging Code	Resistance
	0402 0603 0805 1206 1210 2010 2512	F: ±1% J: ±5%	L: Standard P: High Power	4: 7" Reel 4Kpcs 6: 7" Reel 10Kpcs 7: 7" Reel 5Kpcs 9: 10" Reel 8Kpcs A: 10" Reel 10Kpcs B: 10" Reel 20Kpcs C: 13" Reel 40Kpcs D: 13" Reel 20Kpcs F: Bulk	- 0R047: 0.047Ω - - - 0R1: 0.1Ω  "-." to fill up 6 spaces

### 7. Derating Curve

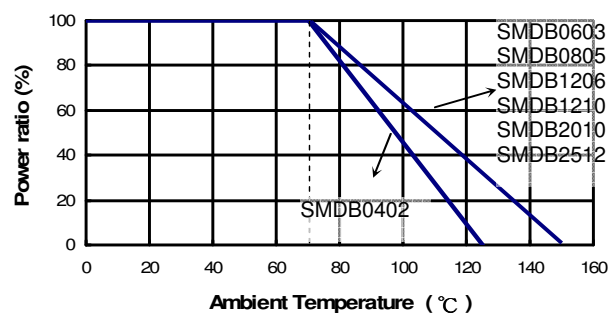

## SMD - Resistors

### ► 8. Standard Electrical Specifications

Type	Item	Power Rating at 70°C	Operating Temp. Range	Resistance Range (mΩ)		TCR (PPM/°C)
				±1%	±5%	
SMDB0402		1/16W	-55~+125°C	50 - 99		±800
				100 - 499		±500
				500 - 976		±200
SMDB0603		1/10W	-55~+155°C	20 - 47		±1200
				50 - 99		±800
				100 - 499		±500
				500 - 976		±200
SMDB0805		1/8W	-55~+155°C	10 - 18		±1500
				20 - 47		±1200
SMDB1206		1/4W		50 - 99		±800
				100 - 499		±500
				500 - 976		±200
SMDB1210		1/3W		-55~+155°C		10 - 18
SMDB2010		3/4W	20 - 47		±800	
			50 - 99		±800	
SMDB2512		1W	100 - 499		±200	
			500 - 976	±200		

Operating Voltage= $\sqrt{P \cdot R}$

Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$

### ► 8.1 High Power Rating Electrical Specifications

Type	Item	Power Rating at 70°C	Operating Temp. Range	Resistance Range (mΩ)		TCR (PPM/°C)
				±1%	±5%	
SMDB0402		1/10W	-55~+125°C	50 - 99		±800
				100 - 499		±500
				500 - 976		±200
SMDB0603		1/8W	-55~+155°C	20 - 47		±1200
				50 - 99		±800
				100 - 499		±500
				500 - 976		±200
SMDB0805		1/4W	-55~+155°C	10 - 18		±1500
				20 - 47		±1200
SMDB1206		1/3W		50 - 99		±800
				100 - 499		±500
				500 - 976		±200
SMDB1210		1/2W		-55~+155°C		10 - 18
SMDB2010		1W	20 - 47		±800	
			50 - 99		±800	
SMDB2512		2W	100 - 499		±200	
			500 - 976	±200		

Operating Voltage= $\sqrt{P \cdot R}$

Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$

## SMD - Resistors



### 9. Environmental Characteristics

Item	Requirement		Test Method
	1%	5%	
Temperature Coefficient of Resistance (T.C.R.)	As Spec.		<b>JIS C 5201-1 4.8</b> <b>IEC 60115-1 4.8</b> -55°C~+125/+155°C, 25°C is the reference temperature
Short Time Overload	$\pm(1.0\%+0.05\Omega)$	$\pm(2.0\%+0.05\Omega)$	<b>JIS C 5201-1 4.13</b> <b>IEC 60115-1 4.13</b> 2.5 times RCWV or Max. overload voltage for 5 seconds, 2 seconds for high power series
Insulation Resistance	$\geq 10G$		<b>JIS C 5201-1 4.6</b> <b>IEC 60115-1 4.6</b> Max. overload voltage for 1 minute
Endurance	$\pm(2.0\%+0.10\Omega)$	$\pm(3.0\%+0.10\Omega)$	<b>JIS C 5201-1 4.25</b> <b>IEC 60115-1 4.25.1</b> 70±2°C, Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	$\pm(2.0\%+0.10\Omega)$	$\pm(3.0\%+0.10\Omega)$	<b>JIS C 5201-1 4.24</b> 40±2°C, 90~95% R.H., Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Dry Heat	$\pm(1.0\%+0.05\Omega)$	$\pm(1.5\%+0.10\Omega)$	<b>JIS C 5201-1 4.23.2</b> <b>IEC 60115-1 2.23.2</b> at +125/+155°C for 1000 hrs
Bending Strength	$\pm(1.0\%+0.05\Omega)$	$\pm(1.0\%+0.05\Omega)$	<b>JIS C 5201-1 4.33</b> <b>IEC 60115-1 4.33</b> Bending once for 5 seconds with 3mm 2010, 2512 sizes: 2 mm
Solderability	>95% coverage		<b>JIS C 5201-1 4.17</b> <b>IEC 60115-1 4.17</b> 245±5°C for 3 seconds
Resistance to Soldering Heat	$\pm(0.5\%+0.05\Omega)$	$\pm(1.0\%+0.05\Omega)$	<b>JIS C 5201-1 4.18</b> <b>IEC 60115-1 4.18</b> 260±5°C for 10 seconds
Voltage Proof	No breakdown or flashover		<b>JIS C 5201-1 4.7</b> <b>IEC 60115-1 4.7</b> 1.42 times RCWV (RMS) for 1 minute
Leaching	Individual leaching area $\leq 5\%$ Total leaching area $\leq 10\%$		<b>JIS C 5201-1 4.18</b> <b>IEC 60068-2-58 8.2.1</b> 260±5°C for 30 seconds
Rapid Change of Temperature	$\pm(0.5\%+0.05\Omega)$	$\pm(1.0\%+0.05\Omega)$	<b>JIS C 5201-1 4.19</b> <b>IEC 60115-1 4.19</b> -55°C to +125/+155°C, 5 cycles

- Storage Temperature: 25±3°C; Humidity < 80%RH

## SMD - Resistors

### ► 10. Soldering Condition

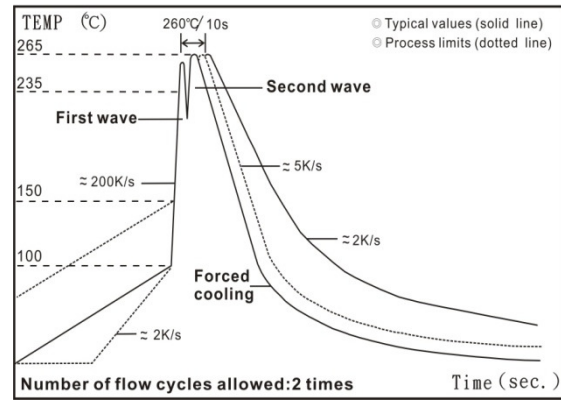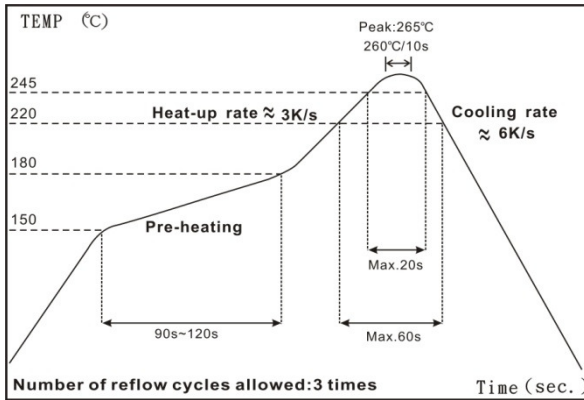

(1) IR Reflow Soldering


(2) Time of IR reflow soldering at maximum temperature point 260°C : 10s

(3) Time of wave soldering at maximum temperature point 260°C : 10s

Time of soldering iron at maximum temperature point 410°C : 5s

### ► 11. Packaging

Reel Specifications & Packaging Quantity

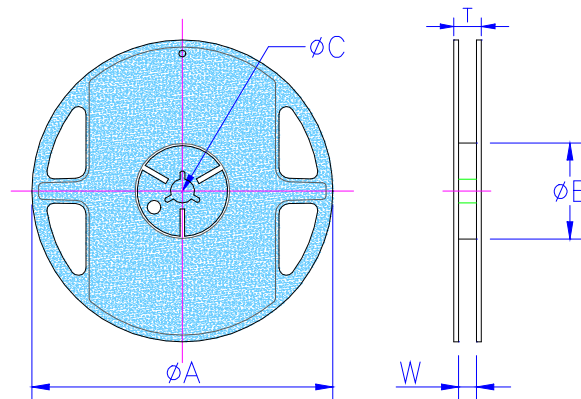


Unit: mm

Type	Packaging Quantity	Tape width	Reel Diameter	ΦA	ΦB	ΦC	W	T	
SMDB0402	Paper	10K	8mm	7 inch	178.5±1.5	60 <sup>+1/-0</sup>	13.0±0.2	9.0±0.5	12.5±0.5
		20K							
		40K							
SMDB0603	Paper	5K	10 inch	254±1	100±0.5	13.0±0.2	9.5±0.5	13.5±0.5	
SMDB0805									
SMDB1206									
SMDB1210									
SMDB2010	Embossed	4K	12mm	7 inch	178.5±1.5	60 <sup>+1/-0</sup>	13.0±0.5	13.0±0.5	15.5±0.5
		SMDB2512							

## SMD - Resistors


### Paper Tape Specifications

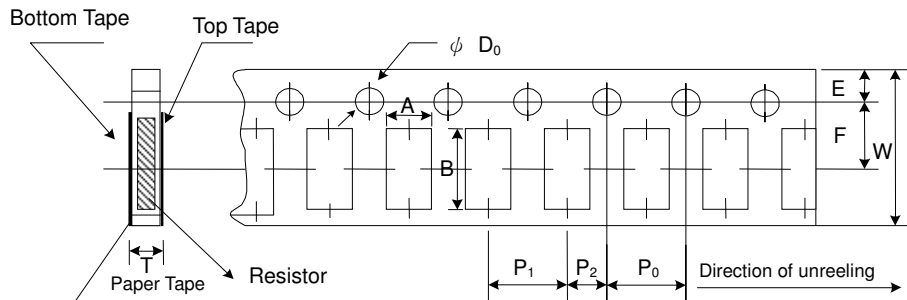

Unit: mm

Type	A	B	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ΦD <sub>0</sub>	T
SMDB0402	0.65±0.10	1.15±0.1	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	2.00±0.05	2.00±0.05	1.50+0.1,-0	0.45±0.1
SMDB0603	1.10±0.10	1.90±0.1	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.70±0.1
SMDB0805	1.60±0.10	2.40±0.2	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.1
SMDB1206	1.90±0.10	3.50±0.2	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.1
SMDB1210	2.80±0.10	3.50±0.2	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.1

### Embossed Plastic Tape Specifications

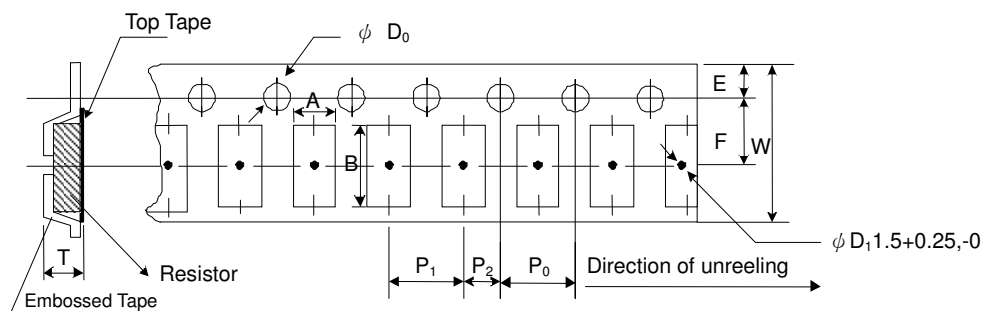

Unit: mm

Type	A	B	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ΦD <sub>0</sub>	T
SMDB2010	2.8±0.20	5.5±0.20	12.0±0.3	1.75±0.1	5.5±0.05	4.00±0.10	4.00±0.1	2.00±0.05	1.50+0.1,-0	1.2 <sup>+0</sup>
SMDB2512	3.5±0.20	6.7±0.20	12.0±0.3	1.75±0.1	5.5±0.05	4.00±0.10	4.00±0.1	2.00±0.05	1.50+0.1,-0	1.2 <sup>+0</sup>

## SMD - Resistors

### ► 12. Marking

No marking for 0402


1%, 5% for 0805/1206/1210/2010/2512: 4 digits marking

Example:


Resistance	47mΩ	75mΩ	15mΩ	750mΩ	820 mΩ
Marking	R047	R075	R015	R750	R820

1%, 5% for 0603: 3 digits marking in E24

1% for 0603: 3 digits marking & under-line in E96 (non-including E24 series)



3 digits marking for E24 & R value suffix is zero in E96: R10=100mΩ R28=280mΩ




3 digits marking for E96: 243=243mΩ 511=511mΩ

E24 code	10	11	12	13	15	16	18	20	22	24	27	30	33	36	39	43	47	51	56	62	68	75	82	91
----------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

### ► 13. Recommended Land Pattern

Unit: mm

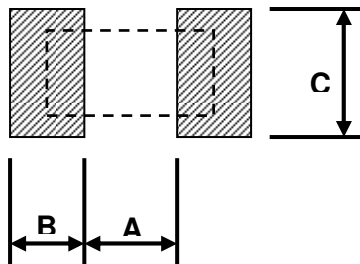

Type	A	B	C
SMDB0402	0.50	0.45	0.60
SMDB0603	0.90	0.60	0.90
SMDB0805	1.20	0.70	1.30
SMDB1206	2.00	0.90	1.60
SMDB1210	2.00	0.90	2.80
SMDB2010	3.80	0.90	2.80
SMDB2512	3.80	1.60	3.50